
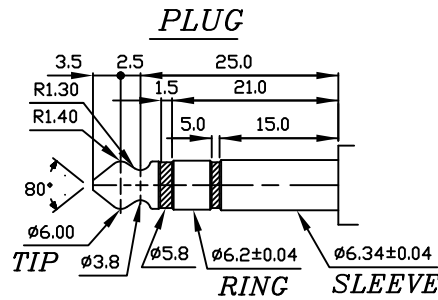


SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED.CLOSE WHEN PLUG IS WITHDRAWN

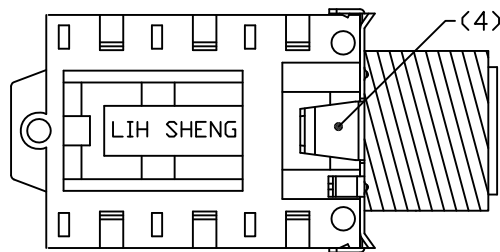

LIH SHENG PRECISION INDUSTRIAL CO., LTD.

|    |              |      |              |        |                 |
|----|--------------|------|--------------|--------|-----------------|
| 6  | WASHER       | 1    | PAPER SHEET  |        | RED(Figgings)   |
| 5  | NUT          | 1    | NYLON-66 G15 |        | BLACK(Figgings) |
| 4  | BRASS COVER  | 1    | C5191R-H     | TIN    |                 |
| 3  | HOUSING      | 1    | PA66-G15     |        | BLACK           |
| 2  | TIP SPRING   | 3    | C5191R-H     | TIN    |                 |
| 1  | SHUNT SPRING | 3    | C2680R-H     | TIN    |                 |
| NO | PART NAME    | Q'TY | MATERIAL     | PLATED | REMARK          |

|  |           |           |                 |                  |       |
|--|-----------|-----------|-----------------|------------------|-------|
| TOLERANCE<br>X. ±0.5<br>X.X ±0.3<br>X.XX ±0.15 | Material  | PART NAME | 6.4φ PHONE JACK |                  |       |
|  | Thickness |           | PART NO.        | LJB0668-6-A(TIN) |       |
|  | Disposal  |           | DATE            | 11/JAN/16'       | REV:A |
| UNIT<br>mm                                     | SCALE     | DRAW      | CHECK           | APPROVE          |       |
|  |           | 2:1       | Chris           | Wen1             | Yen   |